


Obelisk Trellis

82½”H x 20½”W

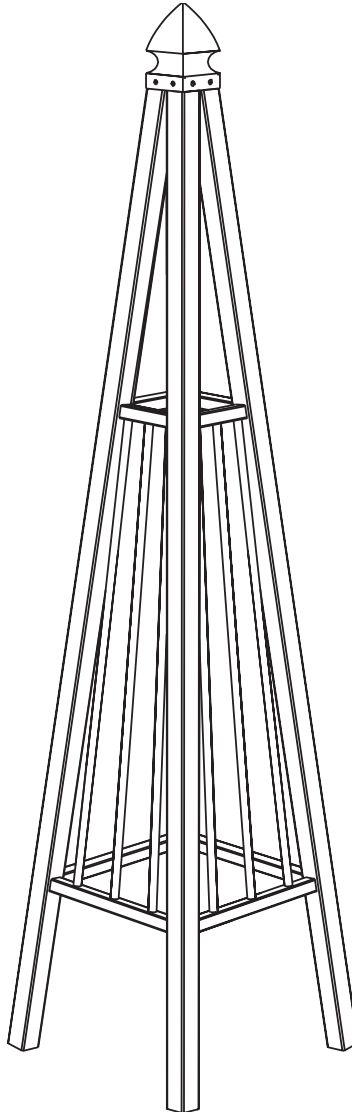

IMPORTANT! PLEASE BE SURE TO FOLLOW INSTRUCTIONS CAREFULLY, IN THE PROPER SEQUENCE! THANK YOU

PARTS LIST

QTY	DESCRIPTION	QTY	DESCRIPTION
4	1" x 1" x 8½" Rails	4	1" x 1" x 16½" Rails
12	⅝" Round Rods x 37½"	1	Assembled A-Frame

STEP 1


Remove all pieces that are telescoped inside posts.

STEP 2

Assemble the 1" x 1" rails with the Obelisk trellis standing in an upright position. If you choose to assemble the Obelisk trellis on its side place the product on a clean, smooth, flat surface ensuring the parts are protected from harsh debris that could scratch the finish of the vinyl.


STEP 3

(Assembly Tip: First lay out all 1" x 1" x 8½" rails to form a square with all ⅝" holes pointing downward.) Insert all 1" x 1" x 8½" rails into top holes of every post very carefully, making sure that the angles match up and the holes in the rails are pointing downward. Be sure that all tabs are fully inserted and engaged.

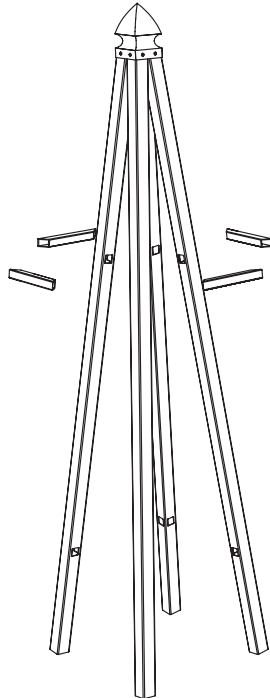


STEP 5

Insert each 5/8" x 37½" Round Rod in the bottom rail first and then finishing with the top rail.

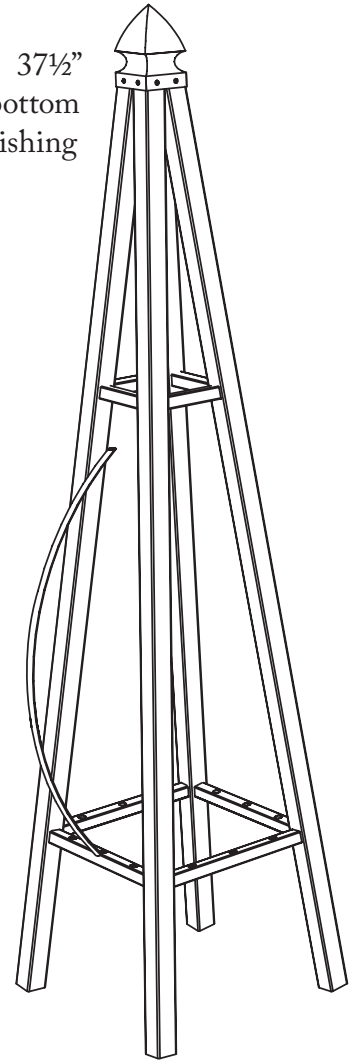

STEP 4

(Assembly Tip: First lay out all 1" x 1" x 16½" rails into the bottom holes of the posts very carefully, making sure that the angles match up and the holes are pointing upward. Be sure that all tabs are fully inserted and engaged.

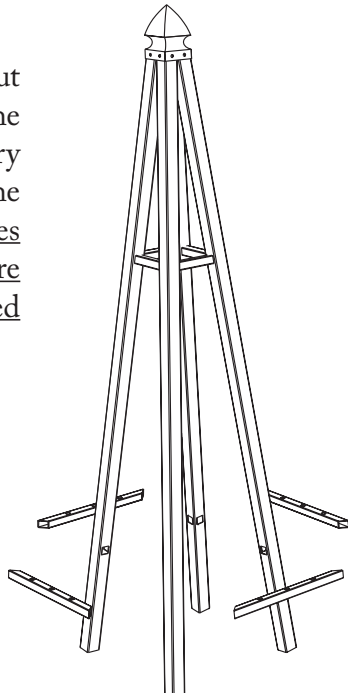

STEP 6

If you live in an area that is occasionally windy, you may want to anchor your Obelisk trellis by sinking the legs in the ground up to 10", and firmly tamping the surrounding soil. (Extra length is added to the legs for this purpose.) On the other hand, if you want to take advantage of the Obelisk's dramatic 82" height, or if you plan to use it on your patio or deck over a potted rose or flowering vine, we have designed an inexpensive stabilization kit. It involves weighting the legs with sand (that you supply) and plugging the bottoms using end caps and a special glue for vinyl that are in the kit. The kit can be ordered from Presidio Customer Service at 1.800.515.2459.